

FRESH  
凍結洗淨


高分子光觸媒

銀離子+負離子

節電運轉


5  
機體防霉(5段)

## 變頻冷暖型 壓縮機全部日本製造

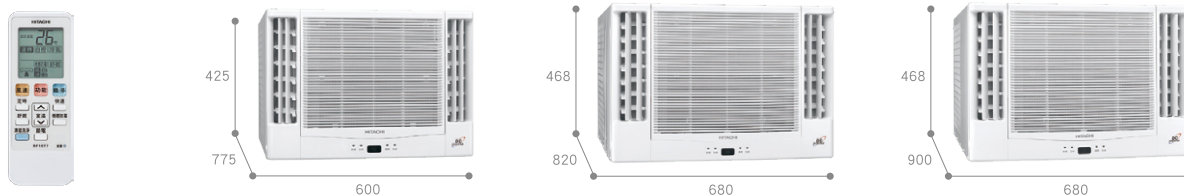

| 冷暖型            | RA-25NR                                                                                                                                                                                                                                                  | RA-28NR  | RA-36NR  | RA-40NR                                                                                                                                                                                                                                                       | RA-50NR   | RA-61NR                                                                                                                                                                                                                                                        | RA-69NR    |
|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| 冷氣能力 (kW)      | 2.5                                                                                                                                                                                                                                                      | 2.8      | 3.6      | 4.1                                                                                                                                                                                                                                                           | 5.0       | 6.1                                                                                                                                                                                                                                                            | 6.9        |
| 暖氣能力 (kW)      | 2.5                                                                                                                                                                                                                                                      | 2.8      | 3.6      | 4.1                                                                                                                                                                                                                                                           | 5.0       | 6.1                                                                                                                                                                                                                                                            | 6.9        |
| CSPF (kWh/kWh) | 5.46                                                                                                                                                                                                                                                     | 5.30     | 4.79     | 5.02                                                                                                                                                                                                                                                          | 4.66      | 4.58                                                                                                                                                                                                                                                           | 4.48       |
| 運轉電流(最大) (A)   | 3.0(6.5)                                                                                                                                                                                                                                                 | 3.3(7.5) | 4.8(8.5) | 5.0(9.0)                                                                                                                                                                                                                                                      | 6.9(10.8) | 8.6(14.0)                                                                                                                                                                                                                                                      | 10.2(14.5) |
| 除濕能力 (l/h)     | 1.6                                                                                                                                                                                                                                                      | 1.78     | 1.9      | 2.8                                                                                                                                                                                                                                                           | 3.4       | 4.3                                                                                                                                                                                                                                                            | 4.8        |
| 消耗電功率 (W)      | 637                                                                                                                                                                                                                                                      | 716      | 1045     | 1054                                                                                                                                                                                                                                                          | 1460      | 1878                                                                                                                                                                                                                                                           | 2226       |
| 年耗電量 (度/年)     | 544                                                                                                                                                                                                                                                      | 628      | 893      | 971                                                                                                                                                                                                                                                           | 1275      | 1582                                                                                                                                                                                                                                                           | 1829       |
| 安裝孔 (寬x高)      | 620x435 mm                                                                                                                                                                                                                                               |          |          | 700x478 mm                                                                                                                                                                                                                                                    |           | 700x478 mm                                                                                                                                                                                                                                                     |            |
| 製品重量 (kg)      | 51                                                                                                                                                                                                                                                       |          |          | 68                                                                                                                                                                                                                                                            |           | 76                                                                                                                                                                                                                                                             |            |
| 外形尺寸(寬x高x深)    | 600x425x775 mm                                                                                                                                                                                                                                           |          |          | 680x468x820 mm                                                                                                                                                                                                                                                |           | 680x468x900 mm                                                                                                                                                                                                                                                 |            |
|                |    |          |          |    |           |    |            |

## 變頻冷暖型 / 變頻冷專型

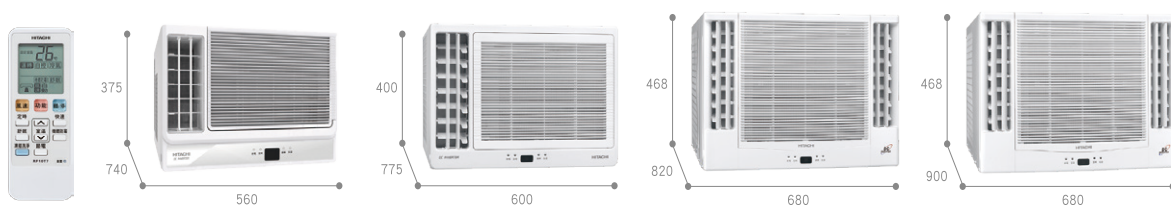

| 冷暖型            | RA-22HR                                                                             | RA-25HR                                                                             | RA-28HR  | RA-36HR  | RA-40HR                                                                               | RA-50HR  | -                                                                                     | -          |
|----------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------|----------|---------------------------------------------------------------------------------------|----------|---------------------------------------------------------------------------------------|------------|
| 冷專型            | RA-22QR                                                                             | RA-25QR                                                                             | RA-28QR  | RA-36QR  | RA-40QR                                                                               | RA-50QR  | RA-60QR                                                                               | RA-68QR    |
| 冷氣能力 (kW)      | 2.2                                                                                 | 2.5                                                                                 | 2.8      | 3.6      | 4.1                                                                                   | 5.0      | 6.0                                                                                   | 6.8        |
| 暖氣能力 (kW)      | 2.2                                                                                 | 2.5                                                                                 | 2.8      | 3.6      | 4.1                                                                                   | 5.0      | —                                                                                     | —          |
| CSPF (kWh/kWh) | 4.82                                                                                | 5.25                                                                                | 5.17     | 4.74     | 4.89                                                                                  | 4.54     | 4.53                                                                                  | 4.37       |
| 運轉電流(最大) (A)   | 3.0(5.5)                                                                            | 3.1(6.0)                                                                            | 3.4(6.5) | 4.9(7.2) | 5.3(9.2)                                                                              | 7.3(9.7) | 8.5(12.5)                                                                             | 10.1(13.1) |
| 除濕能力 (l/h)     | 1.4                                                                                 | 1.6                                                                                 | 1.78     | 1.9      | 2.8                                                                                   | 3.4      | 4.3                                                                                   | 4.8        |
| 消耗電功率 (W)      | 614                                                                                 | 668                                                                                 | 742      | 1057     | 1109                                                                                  | 1521     | 1859                                                                                  | 2205       |
| 年耗電量 (度/年)     | 542                                                                                 | 566                                                                                 | 644      | 902      | 996                                                                                   | 1309     | 1573                                                                                  | 1848       |
| 安裝孔 (寬×高)      | 580x385 mm                                                                          | 620×410 mm                                                                          |          |          | 700x478 mm                                                                            |          | 700x478 mm                                                                            |            |
| 製品重量 (kg)      | 冷暖型:43 冷專型:42                                                                       | 冷暖型:48 冷專型:47                                                                       |          |          | 67                                                                                    |          | 75                                                                                    | 77         |
| 外形尺寸(寬×高×深)    | 560x375x740 mm                                                                      | 600x400×775 mm                                                                      |          |          | 680x468x820 mm                                                                        |          | 680x468x900 mm                                                                        |            |
|                |  |  |          |          |  |          |  |            |

電源  
1Φ 220V 60Hz